

More information:

www.blug.es/eng/productos/

BLUG[®]
Credeblug, s.l.



REFERENCE

C2-1,1

p. 20

RELATED PRODUCTS



C2H-1,1



PEA-1,1



CM4-1,1

MACHINE TYPE

CLAMSHELL GRAB

WORKING SYSTEM

ELECTRO-HYDRAULIC

MATERIAL TO BE HANDLED


MAX. MATERIAL DENSITY

1,1 T/M³

CYLINDER QUANTITY

2

PILED AND BULK MATERIAL UP TO 1,1 t/m³ DENSITY

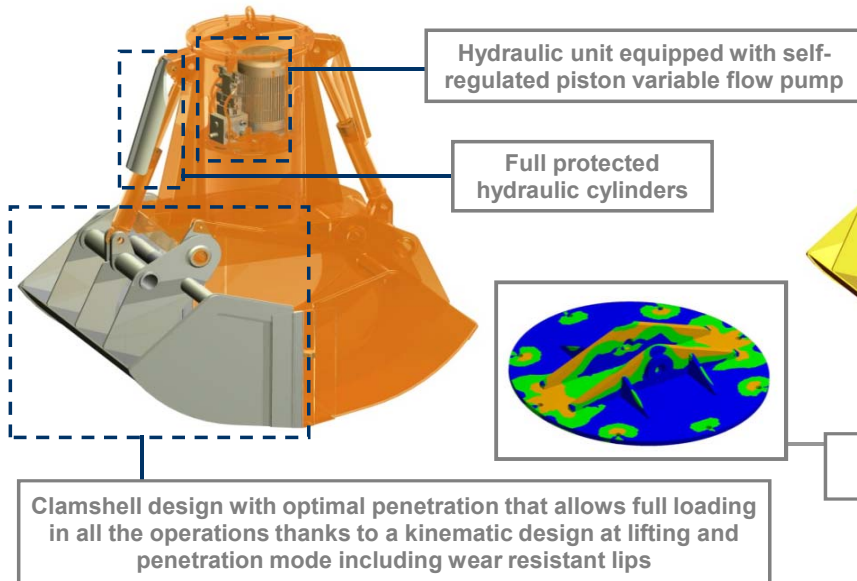



Structure validated by Finite Elements Analysis

Equipment needed

- Hook(s) or lifting chain(s).
- Electric connection for hydraulic unit.

Technical information

- Robust structure in S355 J2G3 rolled steel.
- Oil tank tightly enclosed and protected from environment impurities.
- Reduced height, multi-stable, can work at any angle ($\pm 60^\circ$).
- Design & fabrication according to standard FEM 1001/98 section I.
- CE conformity.

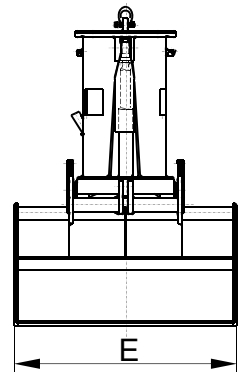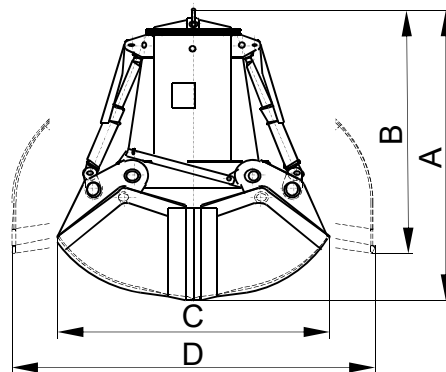

Reference	Capacity m ³	Engine 40% ED kW	Intensity 400 V A	Working pressure bar	Closing time s	Opening time s	Crane SWL t	Weight kg	Dimensions mm				
									A	B	C	D	E
C2-1250-1,1	1,25	7,3	14,5	100	8	4	3,2	1370	2130	1830	1750	2330	1400
C2-1500-1,1	1,5	7,3	14,5	120	8	4	3,2	1420	2190	1840	1850	2445	1500
C2-2000-1,1	2	7,3	14,5	150	8	4	4	1520	2280	1855	2000	2625	1680
C2-2500-1,1	2,5	10	20	200	8	4	5	1610	2350	1865	2150	2760	1850
C2-3000-1,1	3	10	20	150	11	6	6,3	2380	2540	2120	2250	3010	2000
C2-3500-1,1	3,5	10	20	180	11	6	8	2470	2610	2130	2350	3150	2100
C2-4000-1,1	4	10	20	200	13	7	8	2570	2670	2145	2450	3270	2200

SUBJET TO CHANGE WITHOUT NOTICE.

You can request any model's offer visiting our web site www.blug.es or sending an email to comercial@blug.es