

More information:
www.blug.es/eng/productos/



REFERENCE
P-3,5

MAX. MATERIAL DENSITY

3,5 T/M³

STRUCTURE

ROUND


RELATED PRODUCTS



PNA-3




P-3N




PM4-3

MACHINE TYPE
ORANGE PEEL GRAB
 WORKING SYSTEM
ELECTRO-HYDRAULIC
 MATERIAL TO BE HANDLED

CORE SCRAP, BLAST FURNACE, PIG-IRON, OA SCRAP, GREEN PELLETS, INDUSTRIAL HEAVY WASTES, BALED SCRAP, STONES ...

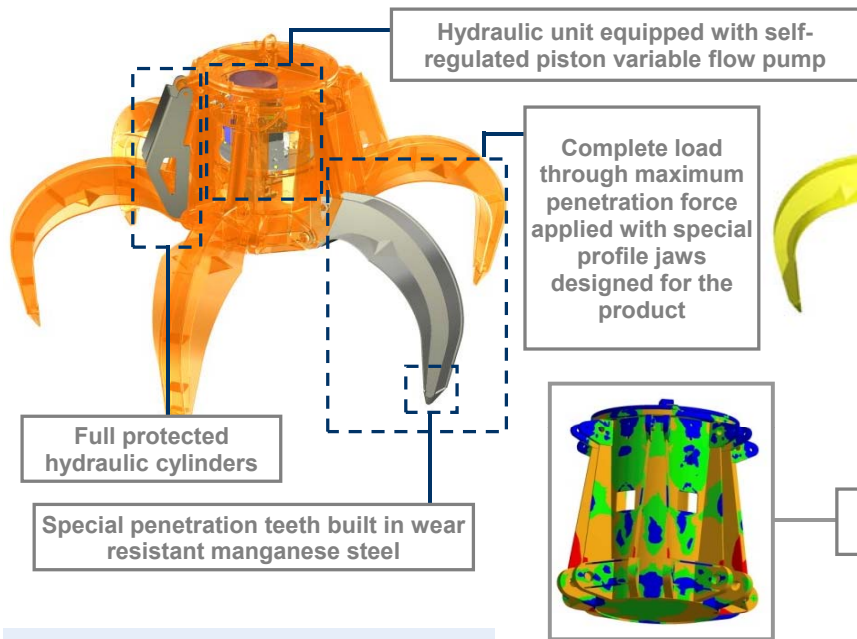

Structure validated by Finite Elements Analysis




Equipment needed

- Hook(s) or lifting chain(s).
- Electric connection for hydraulic unit.

Technical information

- Robust structure in S355 J2G3 rolled steel.
- Oil tank tightly enclosed and protected from environment impurities.
- Design & fabrication according to standard FEM 1001/98 section I.
- CE conformity.

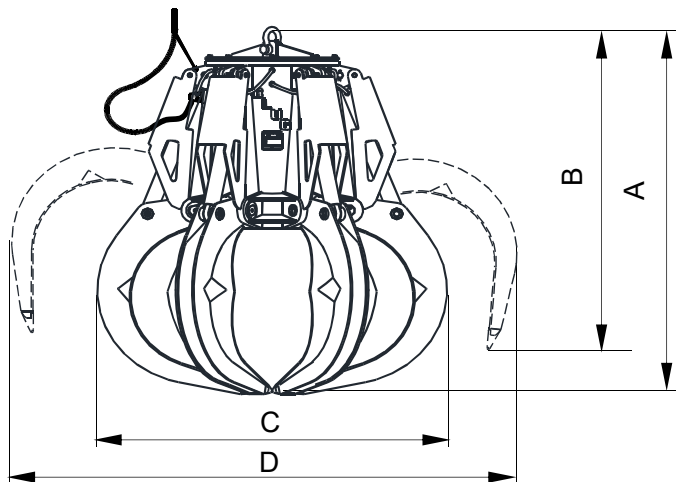

Reference	Capacity	Jaw quantity	Engine 40% ED	Intensity 400 V	Working pressure	Closing time (1)	Opening time	Crane SWL	Weight	Dimensions mm			
	m ³		kW	A	bar	s	s	t	kg	A	B	C	D
P6-1500-3,5	1,5	6	31,5	61	180	10	6	10	4100	2730	2400	2260	3400
P6-2500-3,5	2,5	6	31,5	61	210	10	6	12,5	5000	2885	2450	2500	3710
P6-3200-3,5	3,2	6	40	74,5	170	14	8	18	6800	3035	2865	2700	3845
P6-4000-3,5	4	6	51	94	215	14	8	20	7200	3320	2980	2750	4360
P7-5000-3,5	5	7	62,5	117	170	15	9	30	10500	3605	3240	3020	4790
P8-6300-3,5	6,3	8	70	129	200	17	10	30	11000	3875	3360	3175	5265
P8-8000-3,5	8	8	91	170	240	17	10	40	11600	4060	3440	3460	5640

SUBJECT TO CHANGE WITHOUT NOTICE.

(1) THE LOAD APREHENSION TIME IS CONSIDERED AT 85% OF THE SHELLS STROKE.

You can request any model's offer visiting our web site www.blug.es or sending an email to comercial@blug.es