

More information:  
[www.blug.es/eng/productos/](http://www.blug.es/eng/productos/)



**MACHINE TYPE**  
**ORANGE PEEL GRAB**  
**WORKING SYSTEM**  
**HYDRAULIC**  
**MATERIAL TO BE HANDLED**



**REFERENCE**  
**PNA-0,7**



**MAX. MATERIAL DENSITY**  
**0,7 T/M<sup>3</sup>**  
**STRUCTURE**  
**ROUND**

p. 8



**PNA-1,8**





**P-0,7**




**PM4-0,7**

**RUBBISH, URBAN SOLID WASTE, TURNINGS DOMESTIC AND LIGHT INDUSTRIAL REFUSES, CUT TIRES...**

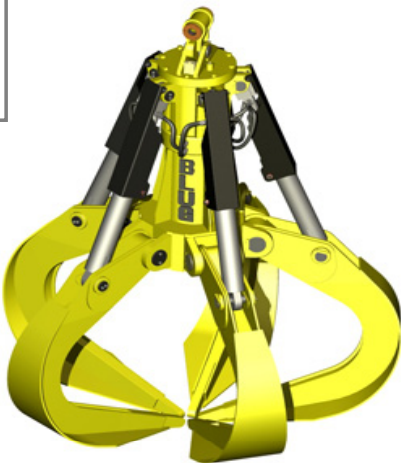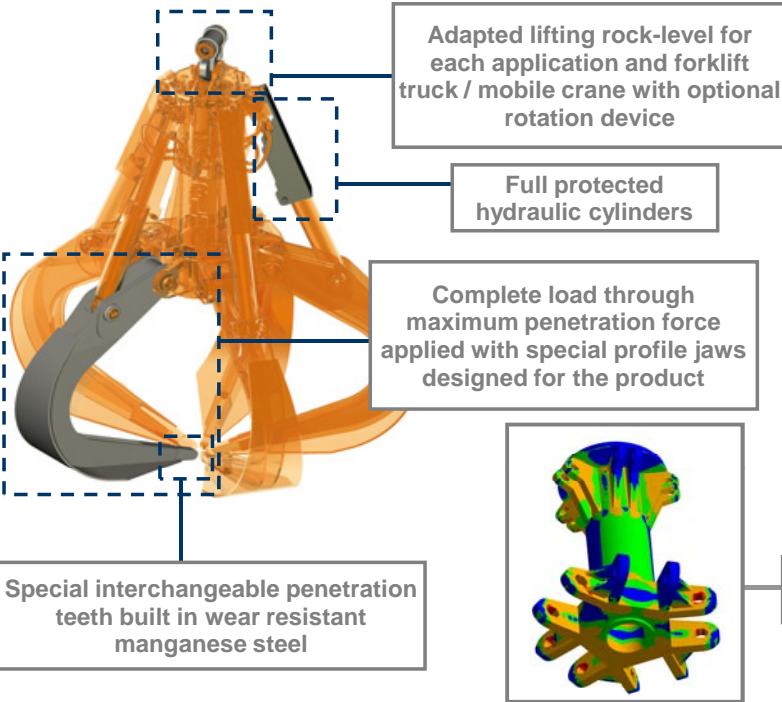

Structure validated by Finite Elements Analysis

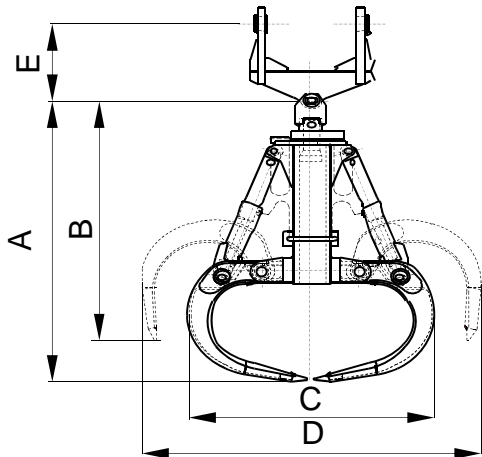

**Equipment needed**

- Attachment from forklift truck / mobile crane.
- Hydraulic supply from external system.

**Technical information**

- Robust structure in S355 J2G3 rolled steel.
- Mechanical (120°) or hydraulic (360°) rotation device.
- Reduced height, multi-stable, can work at any angle (± 60°).
- Design & fabrication according to standard FEM 1001/98 section I.
- CE conformity.

Reference	Capacity	Jaw quantity	Working pressure	Crane SWL	Weight	Dimensions				
						mm				
	m <sup>3</sup>		bar	t	kg	A	B	C	D	E
PNA-2000-0,7	2	5	250	2,7	1250	2260	1845	1945	2610	Depending on forklift truck / mobile crane's suspension
PNA-2500-0,7	2,5	5	250	3,1	1380	2370	1855	1990	2780	
PNA-3000-0,7	3	5	250	3,7	1550	2525	1870	2200	3100	
PNA-4000-0,7	4	5	250	5,1	2300	3110	2520	2330	3500	
PNA-5000-0,7	5	5	250	6	2530	3265	2530	2500	3800	
PNA-6000-0,7	6	6	250	7,6	3360	3480	2600	2520	4140	
PNA-7000-0,7	7	6	250	8,4	3520	3600	2630	2650	4400	
PNA-8000-0,7	8	6	250	9,3	3670	3710	2660	2760	4600	

SUBJET TO CHANGE WITHOUT NOTICE.

You can request any model's offer visiting our web site [www.blug.es](http://www.blug.es) or sending an email to [comercial@blug.es](mailto:comercial@blug.es)