

BLUG®

Credeblug, s.l.



MAX. MATERIAL DENSITY

0,7 T/M³

CABLE QUANTITY

4

RELATED PRODUCTS



PM4-1,8



P-0,7




CV2-1,1

MACHINE TYPE
ORANGE PEEL GRAB
WORKING SYSTEM
MECHANICAL
MATERIAL TO BE HANDLED


RUBBISH, URBAN SOLID WASTE, TURNINGS, DOMESTIC AND LIGHT INDUSTRIAL REFUSES, CUT TIRES...

Complete load through maximum penetration force applied with special profile jaws designed for the product

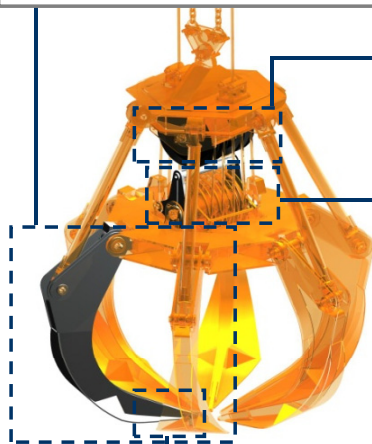

Pulleys block with tempered contact surfaces and mounted on cushions / rollings


Rotating spudding beam to compensate cable's position when working in sloping position



Structure validated by Finite Elements Analysis



Special penetration teeth built in wear resistant manganese steel

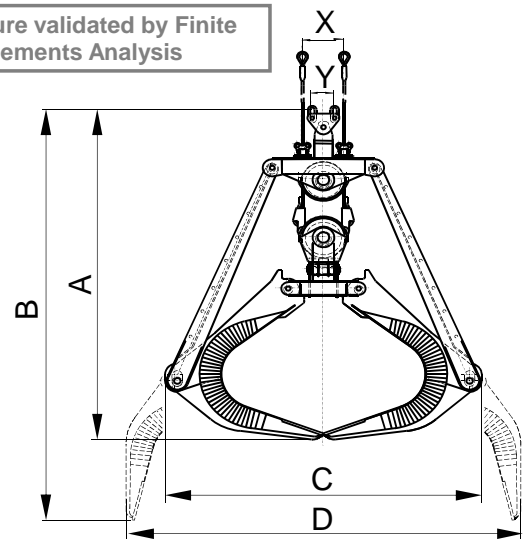

Equipment needed

- 2 lifting cables.
- 2 opening / closing cables.

Technical information

- Robust structure in S355 J2G3 rolled steel.
- Complete load through maximum penetration force.
- Design & fabrication according to standard FEM 1001/98 section I.
- CE conformity.

Reference	Capacity m ³	Jaw quantity	Withdrawn rope mm	Pulley Ø mm	Cable Ø mm	Crane SWL t	Weight kg	Dimensions mm					
								A	B	C	D	X	Y
PM4-1500-0,7	1,5	5	4750	250	12	3,2	1890	2180	2260	2030	3070	265	100
PM4-2000-0,7	2	5	5250	280	12	4	2280	2320	2420	2130	3400	300	120
PM4-2500-0,7	2,5	5	5750	280	14	5	2750	2420	2500	2270	3600	300	120
PM4-3200-0,7	3,2	6	6500	315	16	6,3	3400	2720	2820	2500	3980	340	140
PM4-4000-0,7	4	6	6850	355	18	8	4240	2910	3030	2700	4260	380	160
PM4-5000-0,7	5	6	7050	400	20	10	5100	3170	3360	2940	4600	430	180
PM4-6300-0,7	6.3	6	7950	450	22	12,5	6200	3420	3600	3130	4920	480	220
PM4-8000-0,7	8	6	8400	500	24	14	7650	3730	3890	3380	5350	530	240
PM4-10000-0,7	10	6	9200	560	26	18	8500	4000	4200	3650	5660	595	280
PM4-12500-0,7	12,5	7	9550	630	28	25	11000	4370	4620	4050	6120	670	320
PM4-16000-0,7	16	8	10950	630	32	30	13000	4600	4920	4400	6650	670	350

SUBJET TO CHANGE WITHOUT NOTICE.

Reeving system 1:4 / 1:5

You can request any model's offer visiting our web site www.blug.es or sending an email to comercial@blug.es